

P/N 25-019UL



P/N 25-022UL



ANGLE

FEMALE x MALE

FUNCTION: Used with a fire hose rack assembly or as a fire dept outlet connection.

REGULARLY FURNISHED: Cast brass valve with red handwheel. Female NPT inlet x male hose thread outlet. 300 PSI/20.6 bars.

Model
4060 1 1/2" / 3.8 cm Size
4065 2 1/2" / 6.4 cm Size

SPECIFY: Thread

OPTIONAL FINISHES:
 -B Polished Brass
 -C Rough Chrome Plated
 -D Polished Chrome Plated


VARIATIONS:
 Extended stem up to 24" / 61 cm, **SPECIFY:** Length
 1/8" / .3 cm petcock **SPECIFY:** Location.

DOUBLE FEMALE

FUNCTION: Used with a fire hose rack assembly.

REGULARLY FURNISHED: Cast brass valve with red handwheel. Female NPT inlet and outlet. 300 PSI/20.6 bars.

Model
4070 1 1/2" / 3.8 cm Size
4075 2 1/2" / 6.4 cm Size

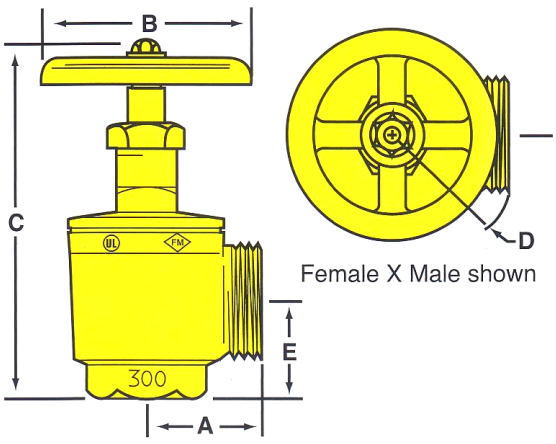

Female X Male shown

Size	UL Listed	FM Approval	A in. cm	B in. cm	Closed C in. cm	Open C in. cm	D in. cm	E in. cm
1 1/2" / 3.8cm	YES	YES	2 1/4 / 5.7	4 / 8.9	6 1/2 / 16.5	7 1/2 / 19	2 1/2 / 6.4	2 / 5
2 1/2" / 6.4cm	YES	YES	3 1/2 / 8.9	5 / 12.7	9 1/2 / 24.1	11 1/2 / 29.2	3 1/2 / 8.9	2 3/4 / 6.9